

RF wireless RGBW remote controller

SR-2839WK with SR-1009XX series




Feature

SR-2839WK Unit is one zone RF wireless RGB controller with 10modes built-in.


Parameter

Remote		Receiver	
Part No.	Operation Voltage	Operation Frequency	Remarks
SR-2839WK	4.5VDC	434MHz/868MHz	RF Wireless
Receiver			
Part No.	Input Voltage	Output Current	Output Power
SR-1009FAWi	12-36VDC	4x5A	4x(60-180)W
SR-1009FA3Wi	12-36VDC	4x350mA	4x(4.2-12.6)W
SR-1009FA7Wi	12-36VDC	4x700mA	4x(8.4-25.2)W
SR-1009FA	12-36VDC	4x5A	4x(60-180)W
SR-1009EA	12-36VDC	4x8A	4x(96-288)W
SR-1009FA3	12-36VDC	4x350mA	4x(4.2-12.6)W
SR-1009FA7	12-36VDC	4x700mA	4x(8.4-25.2)W


Product Size

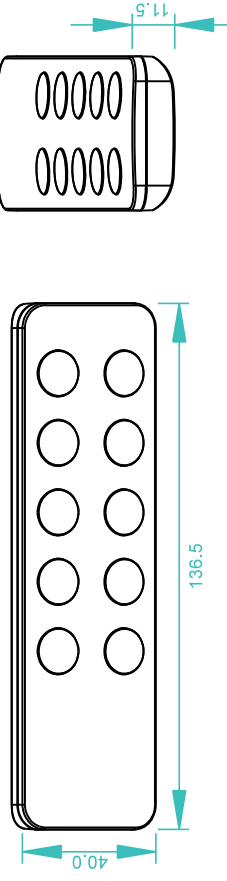

Description of buttons

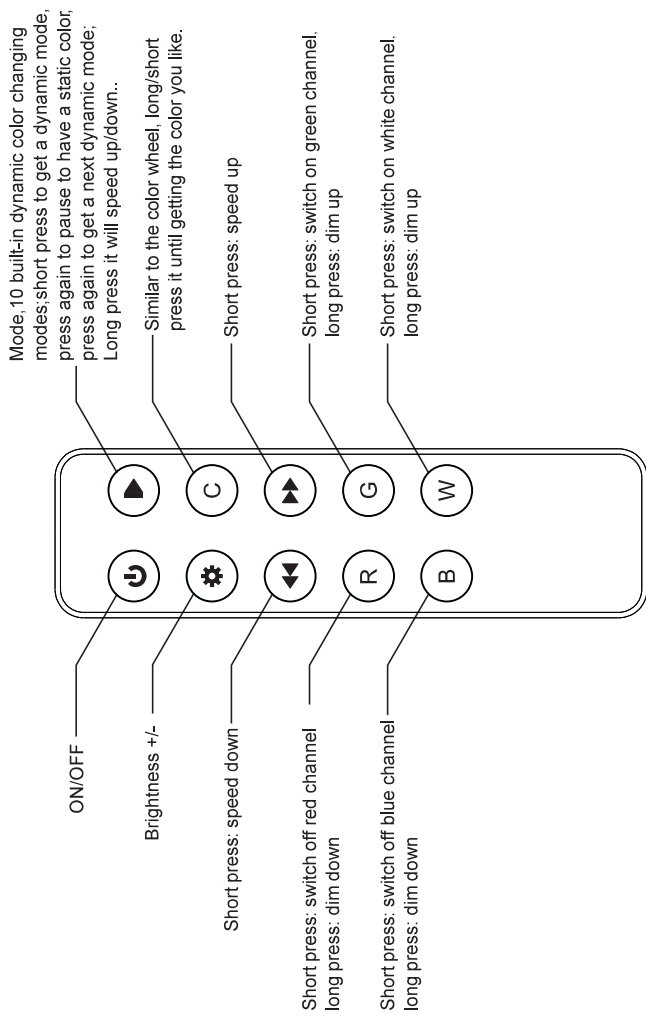

Wiring diagram

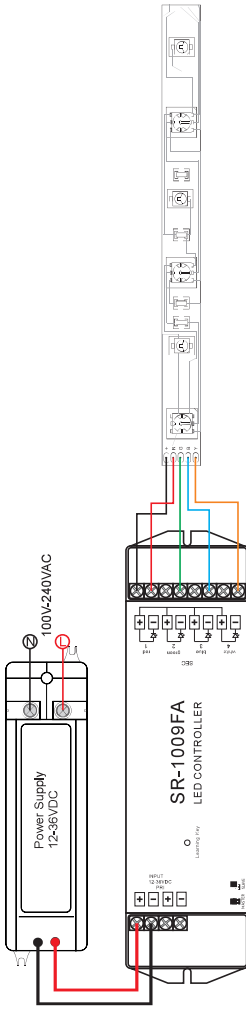

Operation

- Do wiring according to connection diagram
- Learning (matching)
 - Wake up the remote control by touching ON/OFF button.
 - Short Press learning button on receiver immediately press any remote button except the on/off. (press the on/off button here only if you set the receiver as master)
 - If it is learned with light, the light will blink at the same time
 - Press learning button on receiver over 5 seconds until LED light flash, then delete the learned ID.

Safety & Warnings

- 1) The product shall be installed and serviced by a qualified person.
- 2) IP20. Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
- 3) Always be sure to mount this unit in an area with proper ventilation to avoid overheating.
- 4) Please check if the output voltage of any LED power supplies used comply with the working voltage of the product.
- 5) Never connect any cables while power is on and always assure correct connections to avoid short circuits before switching on.
- 6) Please ensure that the cable is secured tightly in the connector
- 7) For update information please consult your supplier.

Warranty Agreement

- 1) We provide lifelong technical assistance with this product:
 - 5-year warranty. We print date on every products, for example :1125 means year 2011 ,week 25. The warranty is for free repair or replacement and covers manufacturing faults only.
 - For faults beyond the 5-year warranty we reserve the right to charge for time and parts.
- 2) Limited Warranty
 - Any defects caused by wrong operation.
 - Any damages caused by unauthorized removal, maintenance, modifying, incorrect connection and replacement of chips.
 - Any damages due to transportation, vibration etc. after purchase.
 - Any damages caused by earthquake, fire, lightning, pollution and abnormal voltage.
 - Any damages caused by negligence, inappropriate storing at high temperatures and humidity or near harmful chemicals.
 - Product has been updated
- 3) Repair or replacement as provided under this warranty is the exclusive remedy to the customer.