

SL60-VF




Reliable Technical Data

- Input Voltage Range: 180-264VAC
- Input Frequency: 50/60Hz
- Output Power: 60W/75W
- Body: PC
- Open Circuit; Short Circuit; Over Load;
- Safety According to EN61347-1, EN61347-2-13
- EMI According to EN55015
- EMS According to EN61000-3-2; EN61000-3-3; EN61547
- EMF According to EN62493
- ERP According to EN1194-2012

SL75-VF



Dimension in mm

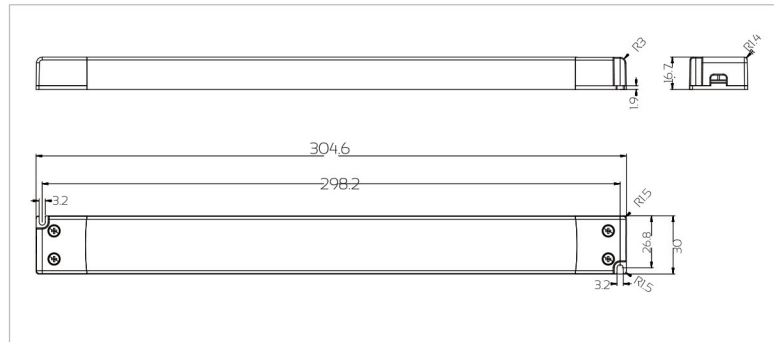

Characteristics

Input Voltage Range: AC180-264V 50/60Hz (power factor measured at AC230V and full load)

Model No.	Constant output voltage	Load	Max output current	PF	Ta	Tc	L x W x H
SL60-12VF	12V	0-60W	5.0A	≥0.9	45°C	80°C	304.6x30x16.7
SL60-24VF	24V	0-60W	2.5A	≥0.9	45°C	80°C	304.6x30x16.7
SL75-12VF	12V	0-75W	6.25A	≥0.9	45°C	80°C	304.6x30x16.7
SL75-24VF	24V	0-75W	3.125A	≥0.9	45°C	80°C	304.6x30x16.7



SNP100-VF-1/SNP100-VF-1S




Reliable Technical Data

- Input Voltage Range: 180-264VAC
- Input Frequency: 50/60Hz
- Output Power: 100W
- Body: PC
- Open Circuit; Short Circuit; Over Load;
- Over Heat Protection
- Safety According to EN61347-1, EN61347-2-13
- EMI According to EN55015
- EMS According to EN61000-3-2; EN61000-3-3; EN61547
- EMF According to EN62493
- ERP According to EN1194-2012

SL100-VF



Dimension in mm

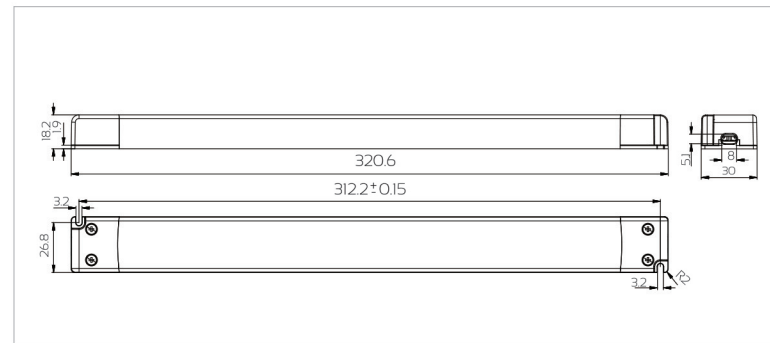

Characteristics

Input Voltage Range: AC180-264V 50/60Hz (power factor measured at AC230V and full load)

Model No.	Constant output voltage	Load	Max output current	PF	Ta	Tc	L x W x H
SNP100-12VF-1	12V	0-100W	8.33A	≥0.9	45°C	85°C	320.6x30x18.2
SNP100-24VF-1	24V	0-100W	4.17A	≥0.9	45°C	85°C	320.6x30x18.2
SNP100-12VF-1S	12V	0-100W	8.33A	≥0.9	45°C	85°C	320.6x30x18.2
SNP100-24VF-1S	24V	0-100W	4.17A	≥0.9	45°C	85°C	320.6x30x18.2
SL100-24VF	24V	0-100W	4.17A	≥0.9	45°C	85°C	320.6x30x18.2

